

Engineering Door Product Catalogue

工程门产品图册



Custom Built • Premium Quality
专业定制 • 品质之选

Focus on Custom Engineering Doors, Serving Projects Worldwide
专注工程门定制，服务全球项目

Contents

目录

01	About Us	3	07	Wooden Door Series	19
	关于我们			木质门系列产品展示	
02	Customization Service	4	08	Process and Technology	22
	定制服务			工艺与技术	
03	Product Series Overview	5	09	Door Swing Setup&Colors Options	26
	产品系列总览			开门方向设定&颜色定制	
04	Steel Door Series	6	10	Optional Hardware	31
	钢质门系列产品展示			五金选配	
05	Fire Door Series	8	11	Packaging & Installation Guide	34
	防火门系列产品展示			包装与安装指南	
06	Entrance Door Series Product Display	10	12	Contact Us	36
	入户门系列产品展示			联系我们	

About Us

Foshan Sailfar Home Co., Ltd.

It is a subsidiary and sales team of Guangdong Qiansheng Fire Protection Technology Co., Ltd. We have an extensive product range. In addition to steel doors, fire- rated doors, entrance doors and wooden door series, we also produce rolling shutters and custom fire- rated doors featuring both fire resistance and sound insulation. To integrate all product lines, we have launched the brand “Yuanfan” as part of our transformation toward foreign trade, selling our products to customers worldwide.

With years of solid industry experience, we rely on advanced automated production equipment and rigorous quality- control systems to deliver versatile door solutions for diverse sectors such as healthcare, education, office buildings and hotels.

We provide one- stop services covering design, production, sales, installation and after- sales support. Tailored to project requirements in terms of dimensions, styles and functional performance, we offer global clients full- chain support from design through to production and delivery, ensuring consistent product quality and efficient on- site project implementation.

Specialized Manufacturing

专业制造

Founded in 2003, our factory has been deeply engaged in the engineering door sector for many years. Equipped with a modern production base and a professional technical team, we implement standardized management from R&D to mass production to guarantee delivery efficiency and process precision, laying a solid product foundation for various engineering projects.

工厂建立于2003年，深耕工程门领域多年，拥有现代化生产基地与专业技术团队，实现从研发到量产的标准化管控，保障交付效率与工艺精度，为各类工程项目筑牢产品根基。

Customization Service

定制服务

Full- range customization is available for dimensions, finish materials and hardware systems. We deliver tailored designs precisely adapted to diverse scenarios including medical clean- room environments, noise- reducing educational premises and light- luxury hotel projects, to create one- of- a- kind door solutions.

支持尺寸、饰面材质、五金系统的全方位定制，精准适配医疗洁净、教育静音、酒店轻奢等多场景的专属设计需求，打造独一无二的门体方案。

Quality Assurance

品质保证

We strictly comply with ISO quality system standards. Three- level inspection controls are implemented, including incoming raw material inspection, in- process production patrol inspection and finished- product pre- delivery testing. Every procedure is closely monitored to ensure each door is long- lasting, safe and reliable.

严格执行ISO质量体系标准，设立原材料入厂检验、生产过程巡检、成品出厂检测三重关卡，层层把关，确保每一扇门经久耐用、安全可靠。

Global Service

全球服务

Our products are exported to many countries and regions worldwide. Well- versed in international trade regulations and certification requirements of various markets, we provide one- stop export support covering product compliance adaptation, customs declaration & clearance, and logistics delivery.

产品远销全球多个国家和地区，熟悉各国贸易法规与认证要求，提供从产品合规适配、报关清关到物流配送的一站式出口支持服务。

关于我们

佛山市远帆集汇家居有限公司

是广东乾盛消防科技有限公司的下属子公司和销售团队。因为公司主营产品多，除钢质门、防火门、入户门、木质门系列外，还可生产卷帘门以及耐火兼备隔音功能的定制防火门，所以综合所有产品成立“远帆”作为公司品牌，转型外贸，向各国销售产品。

深耕行业多年，凭借先进的自动化生产设备与质量控制体系，为医疗、教育、办公、酒店等多元领域，提供多种门体解决方案。

公司整体汇集设计、生产、销售、安装、售后一条龙服务，可根据项目需求实现尺寸、款式和功能性的为各国客户提供从设计到生产交付的全链路支持，确保产品品质与实际落地的高效契合。

Customization Service/定制服务

Meet your personalized requirements and create exclusive, one-of-a-kind door solutions for you.
满足您的个性化需求，为您打造独一无二的专属门体解决方案

01 Custom Size/尺寸定制

We conduct precise measurement and custom production according to actual doorway opening sizes. Strict control of millimeter-level tolerances ensures perfect fitting of door leaf and frame. The seamless installation delivers great sealing performance and elegant appearance.

依据门洞实际尺寸进行精准测量与定制生产，严格把控毫米级误差，确保门扇与门框完美贴合，安装后严丝合缝，兼具极佳的密封性与视觉美观度。

02 Custom Color/颜色定制

Professional color-matching is also available based on your provided color charts, samples or overall interior decoration style. Whether classic solid colors, natural wood grain, vintage distressed finishes or special metallic textures, all can be accurately reproduced to integrate the door body seamlessly into your space.

也支持根据您的色卡、样板或整体装修风格进行专业调色，无论是经典纯色、自然木纹、复古做旧还是特殊金属质感，都能精准还原，让门体与空间融为一体。

03 Custom Style Available/款式定制

Covers diverse styles including modern minimalist, light-luxury minimalism, neo-Chinese, European classic and more. Personalized design is supported for details such as door leaf shapes, linear textures and carved ornaments, creating exclusive door models that combine artistic beauty with unique individuality.

覆盖简约现代、轻奢极简、新中式、欧式古典等多元风格，支持对门扇造型、线条纹理、雕花装饰等细节进行个性化设计，打造兼具艺术美感与独特个性的专属门款。

04 Optional Hardware/五金选配

High-quality hardware accessories are available for your selection, including silent magnetic lock bodies, buffered hydraulic hinges, rust-proof handles and more. Materials cover stainless steel and solid copper, balancing durability, safety and smooth operating feel.

提供高品质五金配件供您选择，涵盖静音磁吸锁体、缓冲液压合页、防锈拉手等，材质包括不锈钢、纯铜等，兼顾耐用性、安全性与顺滑的使用手感。

Product Series Overview

产品系列总览



01 Steel Door Series/钢质门系列

- Medical Steel Door/医用钢质门
- Cleanroom Door/洁净门

Tailored for medical clean environments, it adopts antibacterial sealing technology to effectively prevent dust and inhibit bacteria. Boasting excellent sound insulation and collision resistance, it creates a safe and hygienic protective barrier for hospitals, laboratories and other facilities.

专为医疗洁净环境打造，采用抗菌密封工艺，有效防尘抑菌。兼具优异的隔音与防撞性能，为医院、实验室等场所构建安全卫生的防护屏障。



02 Fire Door Series/防火门系列

- Wood Fire rated Door/木质防火门
- Steel Fire rated Door/钢质防火门

Certified to UL, NFPA, EN, BS and GB standards. Fire- resistance ratings range from 20 minutes to 180 minutes. Filled with high- performance fire- resistant core material, it delivers outstanding heat- insulation and flame- retardant performance. It can also be fitted with fire- rated hardware that is likewise certified to UL, EN and GB standards. In case of fire, it effectively blocks fire and smoke to safeguard lives and property.

已通过UL/NFPA/EN/BS/GB等认证，耐火极限从20分钟至180分钟都有，内置高性能耐火芯材，隔热阻燃效果显著，并可配备也同样通过UL/EN/GB的防火五金件，关键时刻可有效阻隔火势与烟雾，守护生命财产安全。



03 Entrance Door Series/入户门系列

- Steel Entry Door/钢质入户门
- Copper Entry Door/铜质入户门
- Zinc Alloy Entrance Door/锌合金入户门
- Cast Aluminum Armored Door/铸铝装甲门

The entry door range includes single, leaf-and-main, double and pivot entrance doors. Reinforced internal structure avoids door leaf deformation and sagging. Full-size customization supported. Surrounding sealing ensures great sound & heat insulation and dust resistance. Fitted with heavy-duty hinges and multi-point anti-theft locks for reliable safety. Certifications available upon request.

入户门系列包含单开、子母、双开、偏轴大门，内置加强骨架，门扇不易下垂变形。支持全尺寸定制。采用环抱式密封设计，隔音、隔热、防尘效果优异；配备重型承重合页、多点防盗锁体，安全性能优越。可提供对应认证。



04 Wooden Door Series/木质门系列

- Solid Wood Door/原实木门
- Wood Composite Door/实木复合门

It features natural and mellow textures with exquisite tactility. Customized design options are available to perfectly match various decoration styles, creating a warm and elegant ambiance for hotels, apartments and villas. 纹理自然温润，质感细腻。支持个性化定制设计，可完美适配多种装修风格，为酒店、公寓及别墅营造温馨雅致的氛围。

Product Showcase of Steel Door Series

钢制门系列产品展示

● Cleanroom Door/洁净门-03



● Cleanroom Door/洁净门-04



● Cleanroom Door/洁净门-05



● Medical Steel Door/医用钢制门-04



● Medical Steel Door/医用钢制门-05



● Medical Steel Door/医用钢制门-06



● Medical Steel Door/医用钢制门-07





● Medical Steel Door/医用钢制门-01

● Medical Steel Door/医用钢制门-02



● Medical Steel Door/医用钢制门-03



● Cleanroom Door/洁净门-01



● Cleanroom Door/洁净门-02

Clean Space · Safe Passage
洁净空间 · 安全通行

Fire Door Series Showcase
防火门系列产品展示



● Steel Fire rated Door
钢制防火-01



● Steel Fire rated Door
钢制防火门-02



● Steel Fire rated Door
钢制防火门-03



● Wood Fire rated Door
木制防火门-01



● Wood Fire rated Door
木制防火门-02



● Wood Fire rated Door
木制防火门-03



● Wood Fire rated Door
木制防火-03



● Wood Fire rated Door
木制防火门-04

Fire Certification · Reliable Safety
消防认证 · 安全守护

- Steel Fire rated Door-Louvers
钢制防火门-百叶



- Steel Fire rated Door-Vision Panel&Louvers
钢制防火门-带视窗&百叶



- * **P S: Fire-rated doors with vision panels are also UL and EN certified.**
- * 补充：视窗防火门也已通过**UL**和**EN**认证。

Entrance Door Series Product Display

入户门系列产品展示

8 Curated Designs · Interpret Aesthetics of Premium Living / 8款臻选设计 · 诠释高端生活美学



01 / 星芒几何系列



02 / 鎏金波浪系列



03 / 黑曜几何系列



04 / 金韵竖纹系列



05 / 都市格致系列



06 / 简约白韵系列



07 / 原木暖黑系列



08 / 花漾曼陀罗系列

Built to Last · Modern Minimalism
坚固耐用 · 现代简约

01

星芒系列

RADIANCE SERIES

独特的放射状线条纹理设计，如光芒绽放，赋予空间艺术张力。浅灰色调优雅内敛，双开门设计大气磅礴，彰显主人非凡品味。极简的几何美学与精湛工艺的完美融合，为现代家居空间注入独特的艺术气息。

艺术纹理

双开设计

优雅灰调

01 / 放射纹路双开门

02

鎏金波浪系列

WAVE GOLD SERIES

流动的波浪纹理如丝绸般顺滑，铜金色调温暖奢华。两侧玻璃设计引入自然光线，让入户成为一场视觉盛宴。艺术与功能的完美融合，为您开启归家的尊崇仪式感。

波浪纹理

铜金质感

玻璃侧窗



“Where Art Meets Functionality”

C2 / 立体浮雕原木」



03 / 几何LED灯光轻奢大门

03

黑曜几何系列

OBSIDIAN GEO SERIES

棱角分明的几何切面设计，如钻石般璀璨夺目。纯黑色调神秘高贵，现代科技感十足。每一个角度都呈现不同的光影魅力，定义未来人居美学。

几何切面

纯黑质感

科技美学

04

金韵竖纹系列

GOLDEN STRIPE SERIES

竖向条纹肌理巧妙拉长视觉比例，金属质感的金色横条点缀恰到好处。经典的黑金配色方案，赋予空间永恒的时尚魅力与不言而喻的轻奢气质。简约而不简单的设计语言，尽显现代都市的独特品味与艺术张力。

竖纹肌理

金黑配色

轻奢风格



04 / 黑色竖纹黄铜装饰门



05 / 深灰黄铜点缀双开门

05

都市格致系列

URBAN GRID SERIES

四格分区设计简洁利落，金色装饰面板成为视觉焦点，点亮整体空间。深灰色调沉稳大气，是现代都市风格的完美诠释。智能门锁一体化设计，将科技融入美学，实现安全防护与极简美观的兼得。

格状分区

智能门锁

都市风格

06

简欧白韵系列

NEO CLASSIC WHITE SERIES

经典欧式线条勾勒优雅轮廓，纯白色调清新明亮。双开门设计大气稳重，将传统美学与现代工艺完美融合。适合追求经典质感与品质生活的家庭，简约而不简单，历久弥新。

欧式线条

纯白清新

经典永恒



08 / 白色美式子母门

07

原木暖黑系列

WALNUT BLACK SERIES

黑色与胡桃木色的经典碰撞，冷与暖的完美平衡。天然木纹带来温润质感，现代设计中融入自然气息。长拉手设计简约大气，触感舒适，为入户空间注入静谧而奢华的高级感。

胡桃木色

自然质感

长拉手



06 / 黑胡桃拼接极简单门



07 / 白色镂空雕花双开门

08

花漾曼陀罗系列

MANDALA BLOOM SERIES

精致的曼陀罗花纹浮雕，如花朵般绽放在门上。纯白色调纯净优雅，双开门设计庄重典雅。将东方禅意与现代美学完美融合，入户即是修行，为您开启归家的静谧仪式感。

曼陀罗纹

纯白典雅

东方美学

Wooden Door Series

木质门系列产品展示

- Myanmar Teak Solid Timber Door
缅甸柚木原实木门



- American Red Oak Solid Timber Door
美国红橡原实木门



- American White Oak Solid Timber Door
美国白橡原实木门



● Kasala Solid Timber Door
卡斯拉原木门



● Red Walnut Solid Timber Door
红胡桃原木门



● Solid Wood Door
实木复合门-1



● Solid Wood Door
实木复合门-2




● Solid Wood Door
实木复合门-3



● Solid Wood Door
实木复合门-4



● Solid Wood Door
实木复合门-5

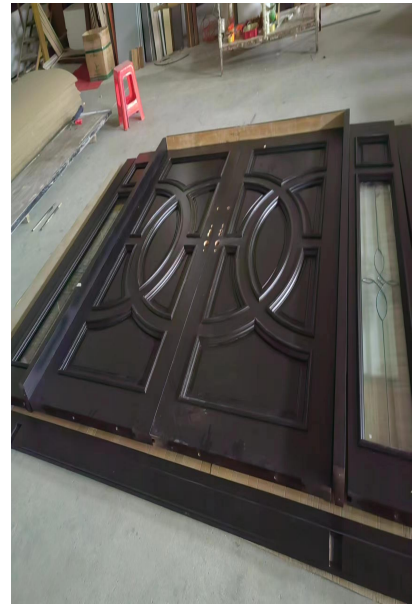

Built to Last · Modern Minimalism
温馨典雅 · 品质生活

TECHNICAL INTRODUCTION

技术简介

Certifications: UL, NFPA, EN, BS and GB certified

Fire Resistance Duration: 20 minutes to 180 minutes

Maximum Custom Size for Double Doors: 9 ft × 5.7 in up to 10 ft 2.2 in Optional Accessories:

Lever locks, panic exit devices, fire-rated glazing windows. Custom surface finishes for door leaf and frame available per RAL colour chart.

Frames: Multiple frame profile designs available to suit various installation conditions.

Hardware: UL-listed / non-UL panic exit devices, exterior trim, door closers, hinges, butt bolts, vision glass, magnetic door holders, door coordinators, smoke seals, lever locks, automatic door bottom seals and more.

认证: 通过UL/ NFPA /EN/BS/GB



耐火时间: 20分钟至180分钟

双开门定制最大尺寸: 9英尺×5.7英寸×10英尺×2.2英尺


可选配: 把手锁、紧急逃生杆及防火窗、门体及框架表面处理可根据RAL色卡定制

框架: 提供多种框架型材设计, 适用于不同安装环境


五金配件: 包括UL/非UL紧急拉手、外侧饰条、门闭锁器、铰链、平接螺栓、观察窗玻璃、磁性门支架、协调器、烟雾密封件、把手锁、自动门底密封件等

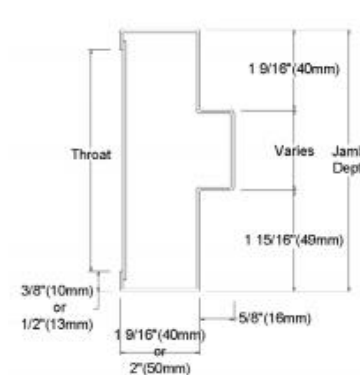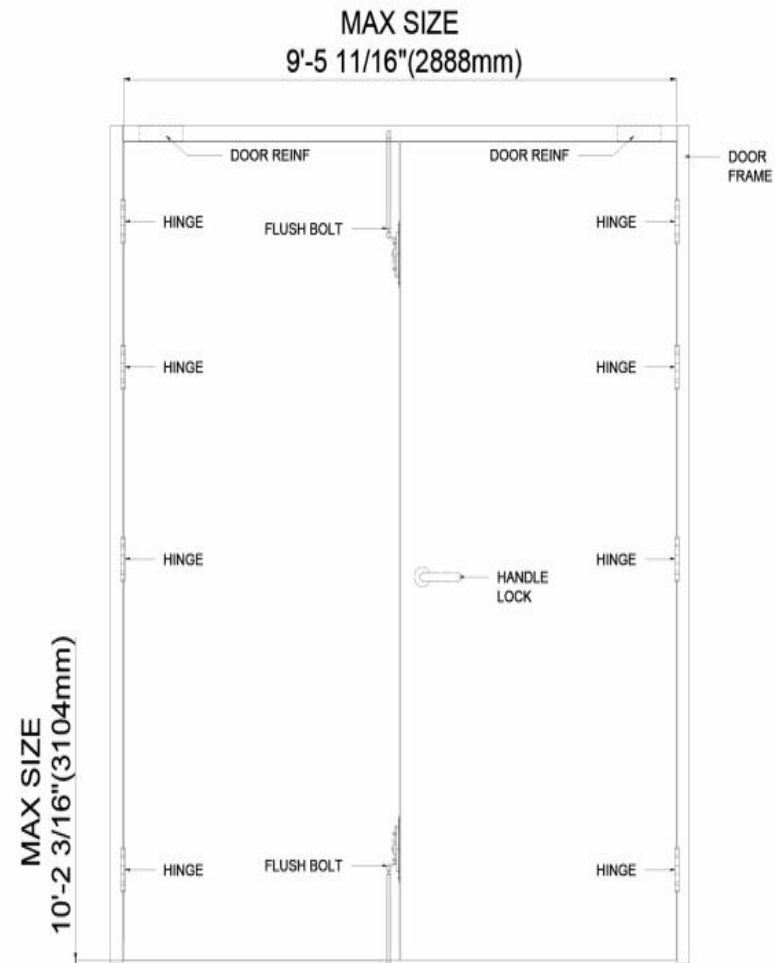

Single Rabbet

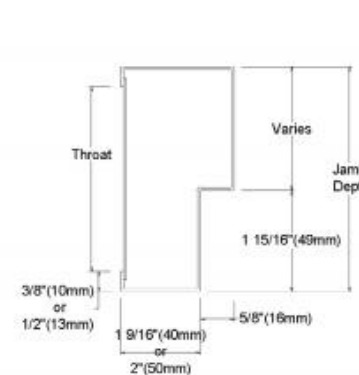

Single Rabbet

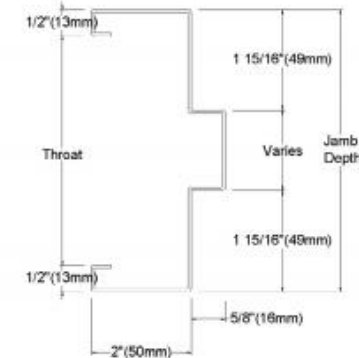

Double Rabbet

STEEL DOOR SKIN

16GA(1.5mm),18GA(1.1mm),20GA(0.9mm)
A40 Galvanized Or Cold-rolled Steel Skins
Construction is 1-3/4" (45mm) Thickness

Hinge,closer,lock and strike plate reinforcements
shall be provided.

Hinge reinforcement:10GA(3.5mm)

Closer reinforcement:12GA(2.5mm)

Lock reinforcement:16GA(1.5mm)

Strike plate reinforcement:16GA(1.5mm)


The top,bottom and side closures are fabricated
from 16GA(1.5mm) thick channel shaped steel sections
welded to the front and back door skins.
Flush top channel:16GA(1.5mm)

Laser-welded side-seamed edge.


Widths up to and including 5' ft

Heights up to and including 10' -2.2' ft

Available with polystyrene core, honeycomb core
or Perlite

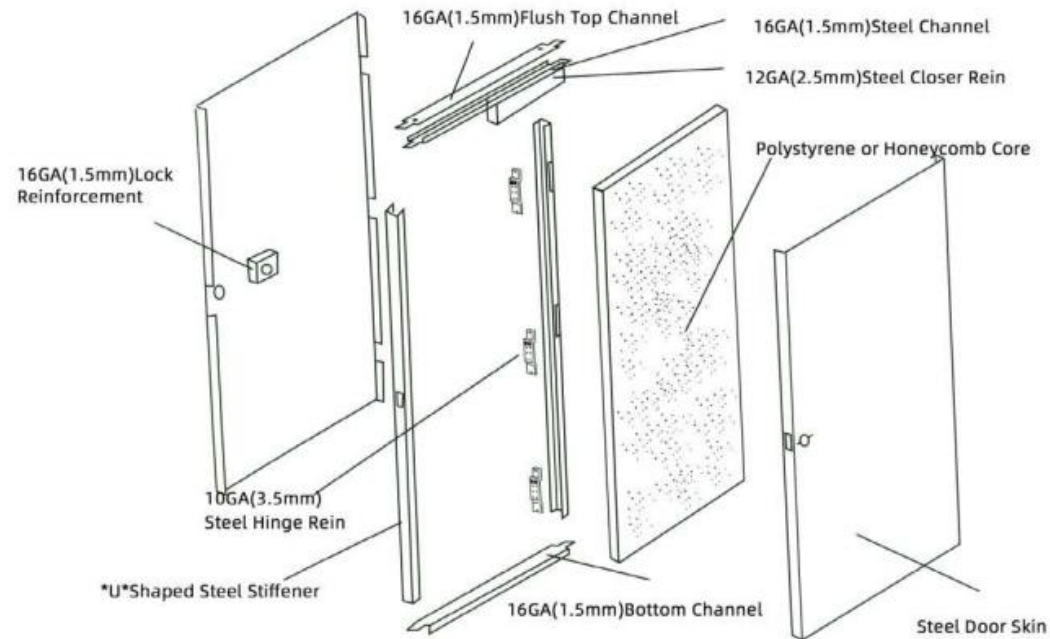

DOOR COMPONENTS

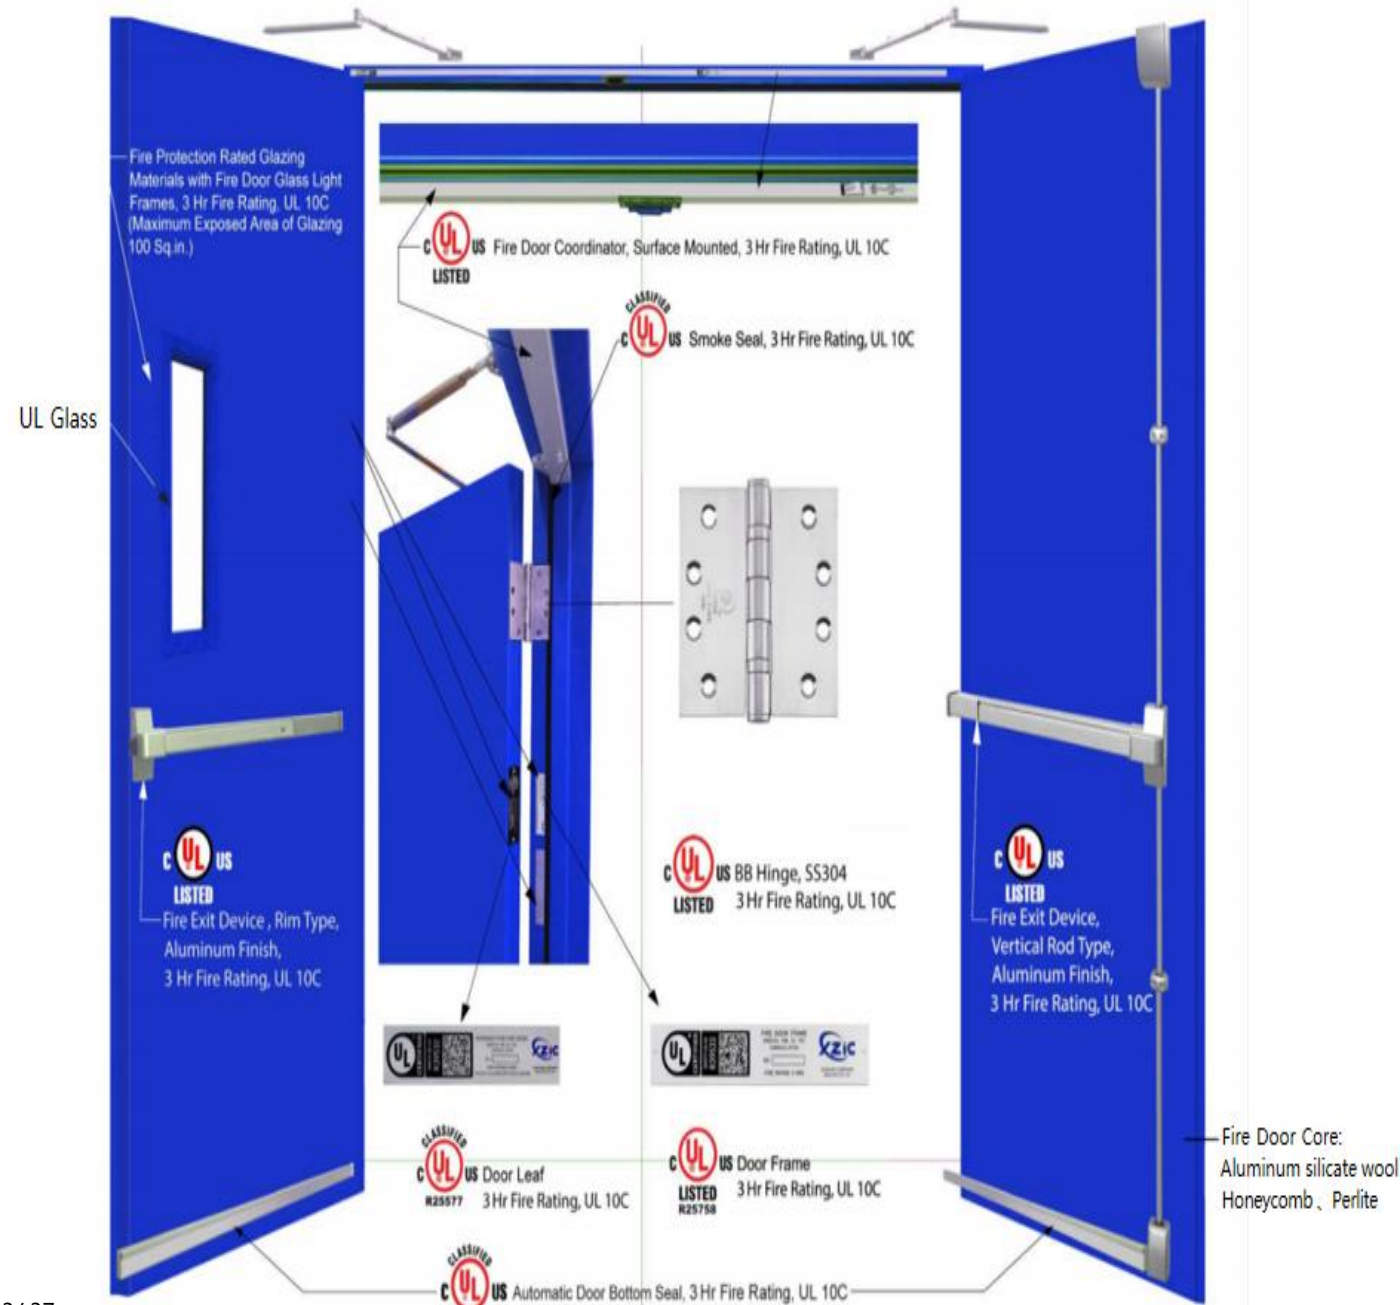

TYPICAL STEEL FRAME DESIGN

典型钢框架设计

Double Rabbet



Single Rabbet



Cased Open



Double Egress




Typical Wall Construction


Butted



Double Rabbet

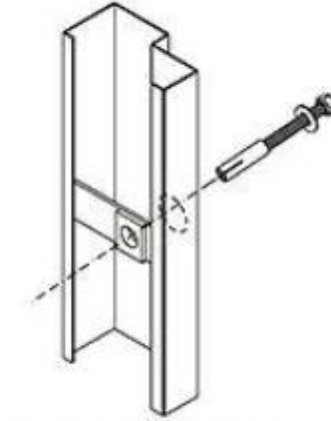

Expansion-Shell Anchor
(Standard)

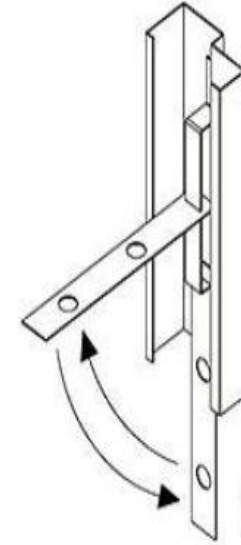

Adjustable Masonry Anchor
(Optional, on request only)

Typical Sill And Wall Anchors

Wire



T



Stud



Sill anchor




Typical Sill And Wall Anchors

Sill anchor (loose)




Pressure anchor

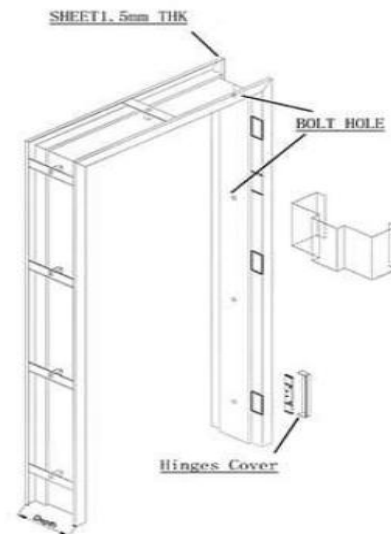

Door frame


MASONRY/STUD CONSTRUCTION FRAME

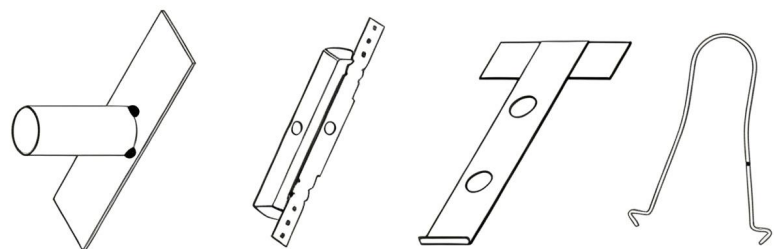

Wire Anchor T Anchor Universal Anchor Tube Anchor


Jamb Depth	4-3/4 "	5-3/4 "	6-1/4 "	6-3/4 "	7-1/4 "	7-3/4 "	8-1/4 "	8-3/4 "	9-1/4 "	10-1/4 "
Throat Opening	3-3/4 "	4-7/8 "	5-1/4 "	5-3/8 "	6-1/4 "	6-3/4 "	7-1/4 "	7-3/4 "	8-1/4 "	9-1/4 "

DRYWALL FRAME

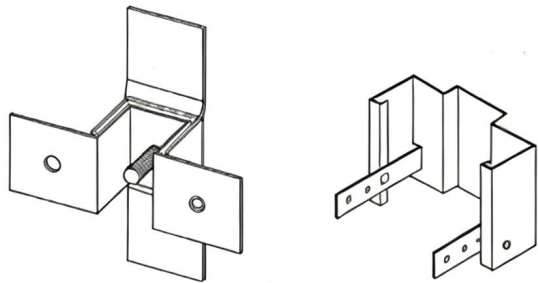

Jamb Depth	4
Throat Opening	3

Frame Profiles

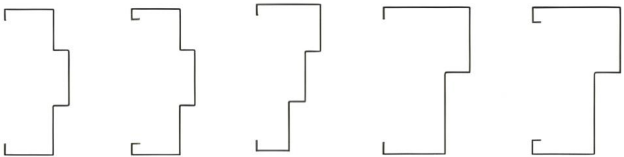

SailFar steel fire doors conform or exceed SDI/HMMA industrial standards, fire tested and certified with UL, Intertek/WH from 20Min up to 3hrs fire rating, complying criteria as UBC7-2, ANSI/UL10C UL 10B CAN/ULC-S104

Steel Fire Door Frame Specifications Introduction
钢质防火门框规格介绍

➤ MASONRY/STUD CONSTRUCTION FRAME

➤ 砌体墙 / 轻钢龙骨墙体门框

Suitable for masonry walls and stud partition walls. Multiple standard anchors are available for stable installation of steel door frames.

适配砖墙、混凝土墙体与轻钢龙骨墙体，配套多款标准锚固配件，稳固安装各类钢制门框。

Specifications: Various sizes of Jamb Depth and Throat Opening are available to meet inch dimension requirements of North American projects.

参数规格：支持多种门框侧边深度（Jamb Depth）与门框喉宽（Throat Opening），满足北美项目常用英寸尺寸选型。

➤ DRYWALL FRAME

➤ 石膏板隔墙门框

Designed for drywall stud partition systems with special connecting brackets, ideal for installation on lightweight interior partition walls.

专为轻钢龙骨 + 石膏板隔墙系统设计，配套隔墙专用连接组件，适配轻质内墙安装工况。

➤ Frame Profiles

➤ 门框型材截面

A wide selection of frame profiles to match different wall thicknesses and fire-rated doors.

提供多种门框截面款式，可搭配不同墙体厚度、耐火等级门扇灵活选配。

Sailfar steel fire doors conform to or exceed SDI/HMMA industrial standards. Products have passed fire tests and obtained certifications from UL, Intertek/WH. Fire resistance ratings range from 20 minutes up to 3 hours, complying with UBC7-2, ANSI/UL10C, UL10B, CAN/ULC-S104 standards.

远帆钢质防火门性能达到并优于 SDI/HMMA 行业标准。产品已通过防火测试，并取得 UL、天祥 Intertek/WH 相关认证。耐火极限覆盖 20 分钟至 3 小时，符合 UBC7-2、ANSI/UL10C、UL10B、CAN/ULC-S104 标准规范。

OPEN DIRECTION INDICATOR

The direction of opening the door can be based on customer need

开门方向指示器：开门方向可根据客户需求设定。



Left inside open



Right inside open




Left outside open




Right outside open




Left inside open



Right inside open



Left outside open



Right outside open

// DOOR SURFACE TREATMENT

表面工艺处理

WOOD GRAIN TRANSFER

仿真木纹效果

Wood grain transfer is a process of applying a wood grain pattern onto a surface, typically used for non-wood materials, to create the appearance of real wood.

After the transfer process, the surface will have the appearance of real wood, with the texture and wood grain pattern imprinted onto it, providing a wide range of design possibilities.

木纹转印是一种将木纹图案转移至表面的工艺，通常用于非木材材质，以营造出真实的外观。经过转印处理后，表面将呈现真实的木纹外观，其纹理与木纹图案均得以完美再现，从而为设计提供了广阔的创新空间。



COLOR OPTIONS 颜色定制



4k9058-3



4k9035-5



ps1583



wt01



wt02



wt03



wt04



wt05




wt06



wt07



wt08



wt09

* SAILFAR offers customized color options, and don't hesitate to contact our sales representatives for more information.

*远帆提供定制化颜色选项，如需了解更多详情，请随时联系我们的销售代表。



SPRAYING PROCESS COLOR OPTIONS

可选喷涂工艺的颜色

In addition, we provide customization services to create unique colors based on our customers' specific requirements. Whatever color you need, we can meet your needs and provide personalized color schemes for your products.

此外，我们还提供定制化服务，可根据客户的具体需求定制专属色彩。无论您需要何种颜色，我们均可满足您的需求，并为您的产品提供个性化的配色方案。



RAL 1000	RAL 1013	RAL 1034
RAL 1001	RAL 1014	RAL 1035
RAL 1002	RAL 1015	RAL 1036
RAL 1003	RAL 1016	RAL 1037
Signalfarbe für Warnung, Vorsicht, Hinweis (DIN 4541) RAL 1004	RAL 1017	RAL 2000
RAL 1005	RAL 1018	RAL 2001
RAL 1006	RAL 1019	RAL 2002
Signalfarbe für Warnung vor Gefahren und Hindernissen (DIN 4541) ehemals Orangegelb RAL 1007	RAL 1020	Kennfarbe für Durchfluss von Säuren (DIN 2403) RAL 2003
verwendet für Rettungszwecke RAL 1011	Kennfarbe für Durchfluss brennbarer Flüssigkeiten (DIN 2403) ehemals Kadmiumgelb RAL 1021	RAL 2004
RAL 1012	RAL 1023	RAL 2008
RAL 1033	RAL 1024	RAL 2009
RAL 9010	RAL 1027	RAL 2010
RAL 9007	auch als Lichtreflex-Gelb bezeichnet RAL 1028	RAL 2011
RAL 7005	RAL 1032	RAL 2012

RAL 7006	RAL 7031	RAL 8000
RAL 7008	RAL 7032	Kennfarbe für Durchfluss brennbarer Flüssigkeiten (DIN 2403) RAL 8001
RAL 7009	RAL 7033	RAL 8002
RAL 7010	RAL 7034	RAL 8003
RAL 7011	verwendet für Rettungszwecke RAL 7035	RAL 8004
RAL 7012	RAL 7036	RAL 8007
RAL 7013	RAL 7037	RAL 8008
RAL 7015	RAL 7038	RAL 8011
RAL 7016	RAL 7039	RAL 8012
RAL 7021	RAL 7040	RAL 8014
RAL 7022	RAL 7042	RAL 8015
RAL 7023	RAL 7043	RAL 8016
RAL 7024	RAL 7044	RAL 8017
RAL 7026	RAL 7045	RAL 8019
RAL 7030	RAL 7046	RAL 8022
RAL 9001	RAL 9016	RAL 8023
RAL 9002	RAL 9017	RAL 8024
RAL 9003	RAL 9018	RAL 8025
RAL 9004	RAL 9021	RAL 8027
RAL 9005	RAL 9022	RAL 8028
RAL 9006	RAL 9023	RAL 8029

RAL 5003	RAL 5000	RAL 6004
RAL 5004	RAL 5001	RAL 6005
RAL 5005	Signalfarbe für Hinweise, Schutzpflicht (DIN 4844) RAL 5002	RAL 6006
RAL 5007	RAL 5025	RAL 6007
RAL 5008	RAL 5026	RAL 6008
RAL 6027	Signalfarbe für Erste Hilfe, Notausgang (DIN 4544) RAL 6002	RAL 6009
RAL 5009	RAL 6003	RAL 6010
Signalfarbe für (unterrichtendes) Gebot (DIN 4844) RAL 5010	RAL 6012	RAL 6011 verwendet für Maschinen
RAL 5011	RAL 6013	RAL 6028
RAL 5012	RAL 6014	RAL 6029
RAL 5013 auch als Luftversch. Blau bezeichnet	RAL 6015	RAL 6031
RAL 5014	RAL 6016	RAL 6032
Korntfarbe für Durchfluss von Sauerstoff (DIN 2403) RAL 5015	RAL 6017	RAL 6033
RAL 5017	Korntfarbe für Durchfluss von Wasser (DIN 2403) RAL 6018	RAL 6034
RAL 5018	RAL 6019	RAL 6035
RAL 5019	RAL 6020	RAL 6036
RAL 5020	RAL 6021	RAL 7000
RAL 5021	RAL 6022	Korntfarbe für Durchfluss von Luft (DIN 2403) RAL 7001
RAL 5022	RAL 6024	RAL 7002
RAL 5023	RAL 6025	RAL 7003
RAL 5024	RAL 6026	RAL 7004

RAL 2013	RAL 3016	RAL 4006
Korntfarbe für Durchfluss von Dampf (DIN 2403) Signalfarbe für Verbot, Halt, Notaus (DIN 4544) RAL 3000	RAL 3017	RAL 4007
RAL 3001	RAL 3018	RAL 4008
Signalfarbe für Brandbekämpfung (DIN 4544) RAL 3002	RAL 3020	RAL 4009
RAL 3003	RAL 3022	RAL 4010
RAL 3004	RAL 3027	RAL 4011
RAL 3005	RAL 3031	RAL 9011
RAL 3007	RAL 3032	RAL 3014
RAL 3009	RAL 3033	RAL 3015
RAL 3011	Korntfarbe für Durchfluss von Laugen (DIN 2403) RAL 4001	RAL 4004
RAL 3012	RAL 4002	RAL 4005
	RAL 4003	RAL 3013

* Due to variations in monitors, there may be slight color variations in the actual colors. When viewing our color chart on electronic devices, please be aware that colors may be influenced by screen brightness, contrast, and color settings.

*由于不同显示器的显示效果存在差异，实际颜色可能会出现轻微偏差。当您在电子设备上查看我们的色卡时，请注意：颜色可能受屏幕亮度、对比度及色彩设置的影响。



➤ Door Hardware/门用五金 (Optional/可选配)

- We supply complete sets of high-quality door hardware, available in UL/EN/BS/GB certified or non-certified versions.
- 我们提供UL/EN/GB认证或非认证的全套高品质五金件。

■ Panic Bar(推门锁)

Specially for emergency egress, designed in accordance with panic exit standards; opens by downward push.
紧急疏散专用，符合逃生标准设计，下压即开

■ Exterior Horizontal Molding(外部水平饰条)

Reinforced door structure, combining decorative appearance and impact resistance.
强化门体结构，兼具装饰性与抗冲击防护

■ Door Closer(闭门器)

Hydraulic cushioning enables quiet automatic door closing with adjustable power.
液压缓冲设计，静音自动闭合，可调力度

■ Hinges(铰链)

Constructed from 304 stainless steel with high load capacity, excellent wear resistance and long service life.
304不锈钢材质，承重力强，经久耐磨

■ Bolts(插销)

Vertical bolts or lateral bolts are optional; double locking ensures higher stability.
天地插销/侧向插销可选，双重锁定更稳固

■ View Window(观察窗)

High-transparency fire-rated glass, clear vision, safe and shatter-resistant.
高透防火玻璃，视野清晰安全防碎

■ Electromagnetic Door Holder(磁力门吸)

Features powerful magnetic retention to hold the door steadily, resisting wind force and impact and eliminating door rebound.
强磁吸附固定，防风防撞，避免门体回弹

■ Coordinator(协调器)

Synchronous control for double doors, smooth opening & closing with consistent motion.
双开门同步控制，启闭顺畅，动作一致

■ Seal(密封条)

Perimeter smoke seal: EPDM rubber, high resilience, sound-insulating, dustproof and waterproof.
三元乙丙橡胶，高回弹，隔音防尘防水

■ Lever Set(执手锁)

Anti-pry and anti-theft design, brushed finish, comfortable grip.
防撬防盗设计，表面拉丝处理，手感舒适

■ Automatic Door Bottom Seal(自动门底密封条)

Automatically rises and falls with door movement, isolating noise and insects, attractive and practical.
随门自动升降，隔绝噪音与蚊虫，美观实用

Quality Assurance: Rigorously selected components, fire-resistant & rust-proof, fit all types of fire doors and entrance doors.
品质保障：全系配件严格选材，防火防锈，适配各类防火门与入户门需求。

HARDWARE PARTS



Handle-1



Handle-2



Handle-3



Handle-4



Mortise Lock-1



Mortise Lock-2



Cylinder-1



Cylinder-2



Cylindrical lock-1



Cylindrical lock-2



Mortise Lock-1



Mortise Lock-2



Mortise lock-3



Viewer



Butt Hinge-1



Spring Hinge-2



Smart Lock-1



Smart Lock-2



Smart Lock-3



Smart Lock-4



Closer-1



Closer-2



Closer-r-3



Closer-4



Lever trim-1



Lever trim-2



Lever trim-3



Concealed hinge



Bottom seal



Magnetic door holder



Pull & push



Push Bar-1



Coordinator-1



Coordinator-2



Flush bolt


HARDWARE PARTS




Push Bar-2




Push Bar-3

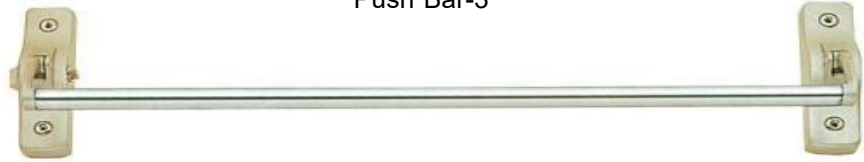

Push Bar-4

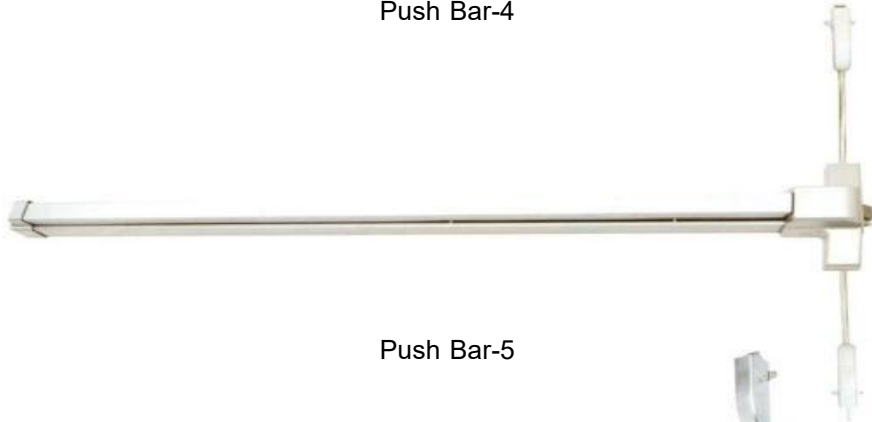


Push Bar-5

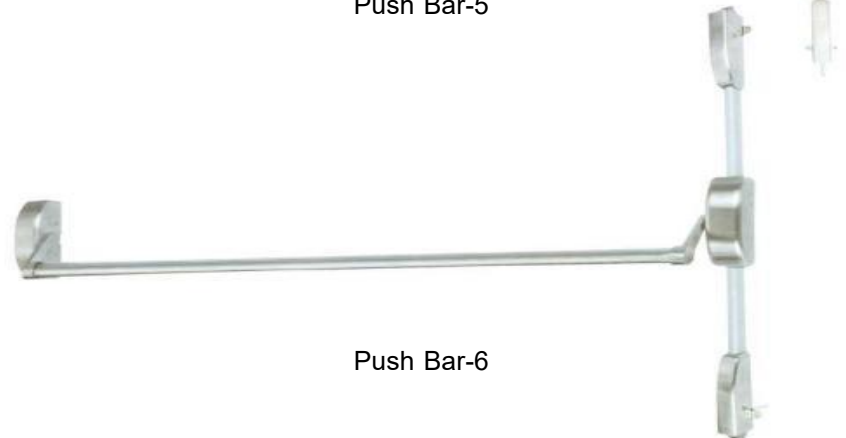


Push Bar-6



Threshold Plate-RP28

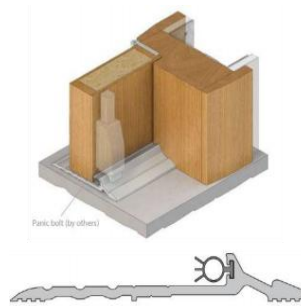

Threshold Plate Seal-RP117Si

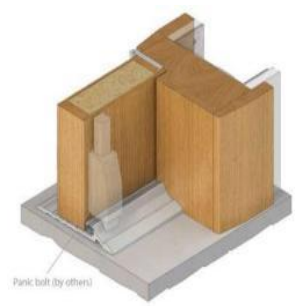

Threshold Plate Seal-RP700



Brush Strip Seal-RP129



Perimeter Seal-RP70Si



half-round door stop



Water Drop Seal-RP700



anti-kick plate

➤ PACKAGING/包装

Moisture-proof, dust-proof and shock-proof package meets requirements of long-distance transport and open storage.

防潮、防尘及防震包装，符合长途运输及露天储存要求



Packing on a pallet
托盘打包



Load the door into the container with a forklift
使用叉车装入集装箱



Packed and loaded into containers (Length: 12 meters)

Product Packaging: Plastic foam + Bubble wrap + Strong carton (optional).

打包完毕装入集装箱 (箱长 12 米)

产品包装: 泡沫塑料 + 气泡膜 + 加固纸箱 (可选)



INSTALLATION GUIDE

安装指南



For proper installation, consult our customer manager for detailed guidance. Here's a summary of the installation process:

A. Pre-Installation:

1. Clear door opening of debris.
2. Verify level and square door frame.
3. Double-check door dimensions for fit.

B. Door Alignment and Positioning:

1. Place door in opening, centering it vertically and horizontally.

2. Use shims if needed for alignment.

C. Fastening the Door:

1. Secure door to frame using suitable screws or anchors.

2. Allow for necessary adjustments.

D. Hinge Installation:

Mark hinge locations on door frame and door. Install hinges with proper alignment and secure attachment.

E. Lockset Installation:

1. Measure and mark lockset location on the door.
2. Follow manufacturer's instructions to install lockset components.

F. Finishing Touches:

1. Test door operation for smooth movement.
2. Adjust door and hardware as needed.
3. Apply touch-up paint to cover any marks or scratches.

For specific requirements, please contact our customer manager for detailed personalized installation guide.

如需规范安装，请联系客户经理获取详细指导。
以下为安装流程概要：

A. 安装前准备

1. 清理门洞内杂物。
2. 校验门框水平度与方正度。
3. 再次复核门扇尺寸，保证装配适配。

B. 门扇对位与定位

1. 将门扇放入门洞，完成水平、垂直双向居中。
2. 如需校正，使用调缝垫片找平对齐。

C. 门扇固定

1. 使用适配螺丝或锚栓将门扇固定在门框上。
2. 预留空间，便于后续微调。

D. 铰链安装

在门框与门扇上标记铰链安装位置。
精准对位安装铰链并牢固锁紧。

E. 锁具安装

1. 在门扇上测量并标记锁具安装点位。
2. 按照原厂说明装配全套锁具配件。

F. 收尾调试

1. 启闭门扇测试，确保开合顺畅。
2. 根据实际情况调整门扇及五金配件。
3. 修补漆面，遮盖安装产生的划痕与印记。

如有特殊安装要求，请联系客户经理，获取针对性的完整安装方案。

Contact Us


联系我们

We look forward to cooperating with you.
期待与您合作

Wechat: Bella



Spongser



Telephone/联系电话

15986381583 (Bella)

13247686201 (Spongser)



Address/公司地址

Wucun Xiwei Industrial Zone, Nanzhuang Town,
Chancheng District, Foshan City, Guangdong Province,
P. R. China/广东省佛山市禅城区南庄镇梧村西围工业区



Website/官方网站

<http://www.sailfarhome.com>



Email/电子邮箱

1912929078@qq.com (Bella)

1014853994@qq.com (Spongser)

Thank You for Viewing

感谢观看

Sailfar 远帆集汇

一扇门 · 一个世界

A DOOR, A WORLD OF POSSIBILITIES

Craft fine doors with ingenuity, serve engineering projects worldwide.

匠心造好门，服务全球工程项目